





208 Front-Page




210 Newsfeed



512 Press Box



706 Reported



710 Coverage




502 Hard News

Style Name	<b>DOCUMENT</b>
Collection Name	<b>In The Press Collection</b>
Style Number	<b>54906</b>
Product Type	<b>Carpet Tile</b>
Construction	<b>Pattern</b>
Fiber	<b>Pivotal™ PET</b>
Dye Method	<b>Solution Dyed</b>
Primary Backing	<b>Synthetic</b>
Secondary Backing	<b>Strataworx</b>
Protective Treatments	<b>SSP Shaw Soil Protection</b>

	U.S.	Metric
Product Size	<b>24 in x 24 in</b>	<b>60.96 cm x 60.96 cm</b>
Gauge	<b>1/10 in</b>	<b>39.37 per 10 cm</b>
Stitches	<b>10 per in</b>	<b>37 per 10 cm</b>
Finished Pile Thickness	<b>0.108 in</b>	<b>2.74 mm</b>
Average Density	<b>5333 oz/yd<sup>3</sup></b>	
Total Thickness	<b>0.23 in</b>	<b>5.84 mm</b>
Tufted Weight	<b>16 oz/yd<sup>2</sup></b>	<b>542.5 g/m<sup>2</sup></b>



## Recommended Installation Methods

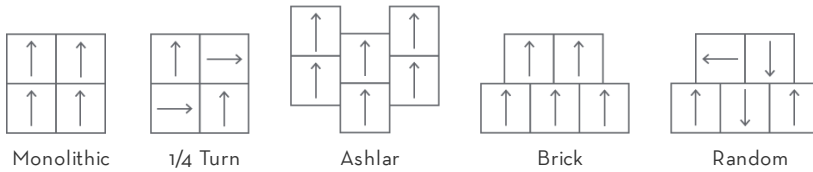

## Performance Testing

Pill Test	<b>Pass</b>
Radiant Panel	<b>Class I</b>
NBS Smoke	<b>Less than 450</b>
Electrostatic Propensity	<b>Less than 3.5 kv</b>
CRI Greenlabel Plus	<b>GLP8233</b>
ADA Compliance	<b>&gt;0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes</b>

## Warranties

**Carpet Tile 10 year Commercial Limited Warranty with Stain and Color for StrataWorx**