



AUTHENTIC FORMAT 858



FINE IMPRESSION 979



FLUID INFINITIES 851

Designs that will inspire your creative side. With an expansive variety of installation methods, our mergeable carpet tiles in the Translations Collection allow you to create daring commercial interiors. Ideal for large, open spaces, with a number of possible install methods to create unique designs.



Designs that will inspire your creative side. With an expansive variety of installation methods, our mergeable carpet tiles in the Translations Collection allow you to create daring commercial interiors. Ideal for large, open spaces, with a number of possible install methods to create unique designs.




521



589



841

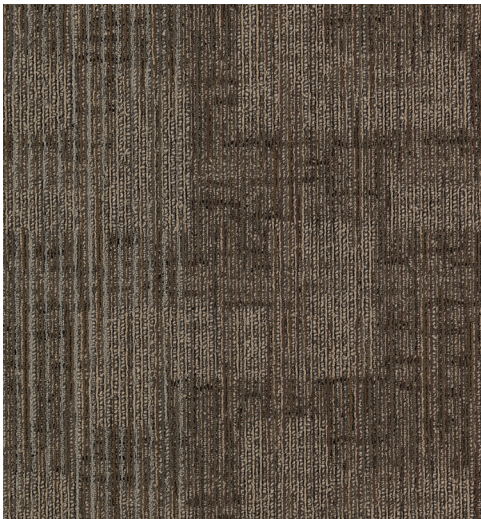

858



869




878



979

UNIQUE DESIGNS WITH MERGEABLE CARPET TILES

Many of our carpet tiles are developed with a gradation of color through the background yarns across the width of the carpet tiles. The progression of color occurs every 18 inches across a 6 foot width or the equivalent of three tiles. Tiles will vary in color and pattern placement as to allow for mergeable carpet tiles and unique carpet design.

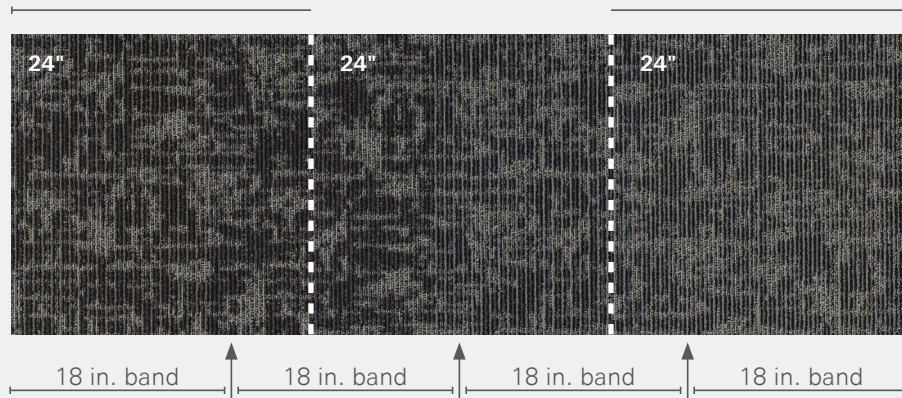


Our mergeable carpet tiles are designed with a progression of color that occurs every 18 inches across a 6 foot width or the equivalent of 3 tiles.

NEW CARPET TILE INSTALLATION METHOD


STEP 1:

Mix new tiles from multiple dye lots and/or cartons. Dye lots will vary so mix them between cartons.

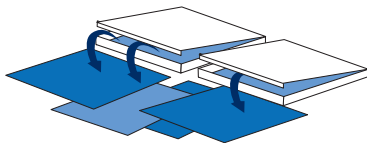

STEP 2:


Use a random installation method to achieve best results across multiple dye lots, install using multidirectional (random) method only



REPLACEMENT CARPET TILE INSTALLATION METHOD


STEP 1:

Remove worn tiles.

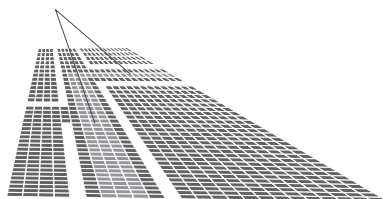


STEP 2:

Mix new tiles from multiple dye lots and/or cartons.

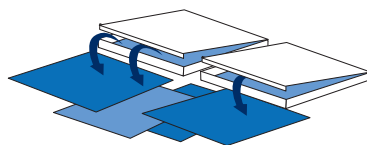

STEP 3:

Blend in old and new tiles.

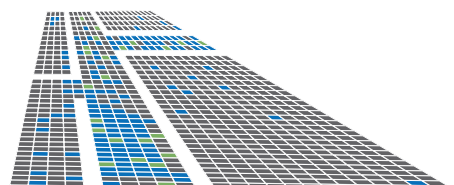

AUTHENTIC FORMAT

FINE IMPRESSION

FLUID INFINITIES

Style Number	QA79	QA74	QA73
Construction	Tufted	Tufted	Tufted
Surface Appearance	Textured Patterned Loop	Textured Patterned Loop	Textured Patterned Loop
Gauge	1/12" (47.00 rows per 10 cm)	1/12" (47.00 rows per 10 cm)	1/12" (47.00 rows per 10 cm)
Pile Weight	15	15	15
Density	7,296	6,673	6,514
Dye Method	100% Solution Dyed	100% Solution Dyed	100% Solution Dyed
Fiber Type	Colorstrand® SD Nylon	Colorstrand® SD Nylon	Colorstrand® SD Nylon
Stain Release Technology	Mohawk Protection Plus Stain	Mohawk Protection Plus Stain	Mohawk Protection Plus Stain
Soil Release Technology	Mohawk Protection Plus Soil	Mohawk Protection Plus Soil	Mohawk Protection Plus Soil
Primary Backing	Non Woven Synthetic	Non Woven Synthetic	Non Woven Synthetic
Secondary Backing	UltraSet® Matrix	UltraSet® Matrix	UltraSet® Matrix
Sqyd / Carton	10.66 sqyd/ctn	10.66 sqyd/ctn	10.66 sqyd/ctn
Recycled Content	Contains a minimum of 39% pre-consumer recycled content by total product weight	Contains a minimum of 39% pre-consumer recycled content by total product weight	Contains a minimum of 39% pre-consumer recycled content by total product weight
Indoor Air Quality	Green Label Plus Certified # 1098	Green Label Plus Certified # 1098	Green Label Plus Certified # 1098
Size	24" x 24" (.6096 m x .6096 m)	24" x 24" (.6096 m x .6096 m)	24" x 24" (.6096 m x .6096 m)
Installation Method	Quarter Turn / Brick Ashlar / Vertical Ashlar / Monolithic / Multi Directional	Quarter Turn / Brick Ashlar / Vertical Ashlar / Monolithic / Multi Directional	Quarter Turn / Brick Ashlar / Vertical Ashlar / Monolithic / Multi Directional
Flammability	ASTM E 648 Class 1 (Glue Down)	ASTM E 648 Class 1 (Glue Down)	ASTM E 648 Class 1 (Glue Down)
Smoke Density	ASTM E 662 Less than 450	ASTM E 662 Less than 450	ASTM E 662 Less than 450
Static Propensity	AATCC-134 Under 3.5 KV	AATCC-134 Under 3.5 KV	AATCC-134 Under 3.5 KV
Country of Origin	USA	USA	USA
Warranty	Lifetime Limited Wear Warranty Lifetime Limited Static Protection Warranty Lifetime Limited Edge Ravel, Zippering, Delamination, and Dimensional Stability Warranty Lifetime Limited Colorfastness to Light Warranty 10-Year Limited Stain Resistance Warranty 10-Year Limited Colorfastness to Atmospheric Contaminants	Lifetime Limited Wear Warranty Lifetime Limited Static Protection Warranty Lifetime Limited Edge Ravel, Zippering, Delamination, and Dimensional Stability Warranty Lifetime Limited Colorfastness to Light Warranty 10-Year Limited Stain Resistance Warranty 10-Year Limited Colorfastness to Atmospheric Contaminants	Lifetime Limited Wear Warranty Lifetime Limited Static Protection Warranty Lifetime Limited Edge Ravel, Zippering, Delamination, and Dimensional Stability Warranty Lifetime Limited Colorfastness to Light Warranty 10-Year Limited Stain Resistance Warranty 10-Year Limited Colorfastness to Atmospheric Contaminants



Up to 2,000 sq. ft. available within 10 business days or less



GROUNDING STRUCTURE SPIRITED MOMENT

TRANSFORMING SPACES

Style Number	QA71	QA72	QA80
Construction	Tufted	Tufted	Tufted
Surface Appearance	Textured Patterned Loop	Textured Patterned Loop	Textured Patterned Loop
Gauge	1/12" (47.00 rows per 10 cm)	1/12" (47.00 rows per 10 cm)	1/12" (47.00 rows per 10 cm)
Pile Weight	15	15	15
Density	7,200	8,047	6,592
Dye Method	100% Solution Dyed	100% Solution Dyed	100% Solution Dyed
Fiber Type	Colorstrand® SD Nylon	Colorstrand® SD Nylon	Colorstrand® SD Nylon
Stain Release Technology	Mohawk Protection Plus Stain	Mohawk Protection Plus Stain	Mohawk Protection Plus Stain
Soil Release Technology	Mohawk Protection Plus Soil	Mohawk Protection Plus Soil	Mohawk Protection Plus Soil
Primary Backing	Non Woven Synthetic	Non Woven Synthetic	Non Woven Synthetic
Secondary Backing	UltraSet® Matrix	UltraSet® Matrix	UltraSet® Matrix
Sqyd / Carton	10.66 sqyd/ctn	10.66 sqyd/ctn	10.66 sqyd/ctn
Recycled Content	Contains a minimum of 39% pre-consumer recycled content by total product weight	Contains a minimum of 39% pre-consumer recycled content by total product weight	Contains a minimum of 39% pre-consumer recycled content by total product weight
Indoor Air Quality	Green Label Plus Certified # 1098	Green Label Plus Certified # 1098	Green Label Plus Certified # 1098
Size	24" x 24" (.6096 m x .6096 m)	24" x 24" (.6096 m x .6096 m)	24" x 24" (.6096 m x .6096 m)
Installation Method	Quarter Turn / Brick Ashlar / Vertical Ashlar / Monolithic / Multi Directional	Quarter Turn / Brick Ashlar / Vertical Ashlar / Monolithic / Multi Directional	Quarter Turn / Brick Ashlar / Vertical Ashlar / Monolithic / Multi Directional
Flammability	ASTM E 648 Class 1 (Glue Down)	ASTM E 648 Class 1 (Glue Down)	ASTM E 648 Class 1 (Glue Down)
Smoke Density	ASTM E 662 Less than 450	ASTM E 662 Less than 450	ASTM E 662 Less than 450
Static Propensity	AATCC-134 Under 3.5 KV	AATCC-134 Under 3.5 KV	AATCC-134 Under 3.5 KV
Country of Origin	USA	USA	USA
Warranty	Lifetime Limited Wear Warranty Lifetime Limited Static Protection Warranty Lifetime Limited Edge Ravel, Zippering, Delamination, and Dimensional Stability Warranty Lifetime Limited Colorfastness to Light Warranty 10-Year Limited Stain Resistance Warranty 10-Year Limited Colorfastness to Atmospheric Contaminants	Lifetime Limited Wear Warranty Lifetime Limited Static Protection Warranty Lifetime Limited Edge Ravel, Zippering, Delamination, and Dimensional Stability Warranty Lifetime Limited Colorfastness to Light Warranty 10-Year Limited Stain Resistance Warranty 10-Year Limited Colorfastness to Atmospheric Contaminants	Lifetime Limited Wear Warranty Lifetime Limited Static Protection Warranty Lifetime Limited Edge Ravel, Zippering, Delamination, and Dimensional Stability Warranty Lifetime Limited Colorfastness to Light Warranty 10-Year Limited Stain Resistance Warranty 10-Year Limited Colorfastness to Atmospheric Contaminants



Up to 2,000 sq. ft. available within 10 business days or less

